

# CADENCE

# ZRS

## ZRS6KM

### 6.5 inch

### TS PARAMETERS

FMS: 128.2 Hz	BL: 4.7 N/A
QMS: 2.98	SPL: 103 dB
QES: 0.96	VAS: 5.3
QTS: 0.72	RE: 3.2 Ohm
RES: 7 Ohm	RP: 10.4 Ohm
RMS: 2.3 kg/s	LP: 4.9 mH
CMS: 0.19 mm/N	CP: 516.6 $\mu$ F
MMS: 8.3 gr	LE: 0.3 mH
NREF: 1.13 %	


## 4 Ohm 150 Watts

### SPECIFICATIONS



Application: High Spl Midrange Drivers  
Basket Type: Stamped Steel  
Dust Cap: Bullet Phase Plug  
Surround Style: Laminated Cloth Accordion  
Structure Weight: 50 oz.  
1.5 inch CCAR High Power Voice Coil  
Impedance: 4 Ohm  
RMS / Peak Watts: 75 / 150  
Frequency Response: 250Hz - 22KHz  
SPL @ 1w/1m: 103dB

### FEATURES

6.5 inch Two Way Component Speaker System  
6.5 inch Kevlar Reinforced Pulp Paper Cone  
25 oz. Magnet  
14k Gold Plated Speaker Terminals  
1 inch Silk Dome Tweeters w/Neo Magnet  
Ferro-Fluid Enhanced Voice Coil Cooling  
Impedance Matching 12dB Two Way Crossover Network  
Includes Tweeter Flush, Surface Mounts  
Complete with Grills and Mounting Hardware

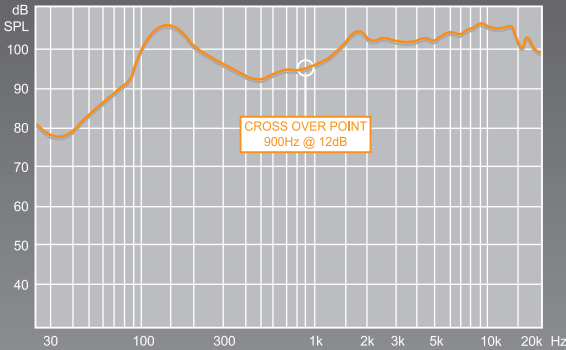

Freq Resp

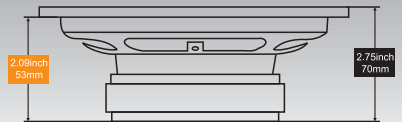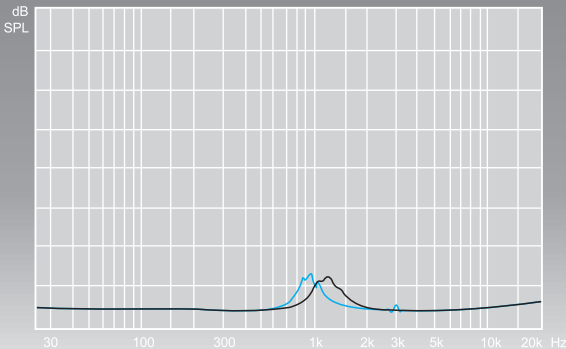

Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731  
800.477.2328 • 732.370.6400 • fax: 732.370.5553 • www.cadencesound.com

